
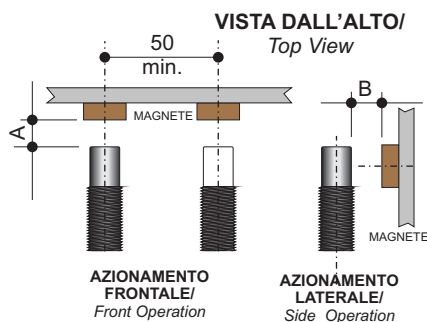


CARATTERISTICHE ELETTRICHE DEL CONTATTO ELECTRICAL DATA OF CONTACT


Max. Potenza Commutabile Max. Contact Rating	60	VA
Max. Corrente Commutabile Max. Switching Current	1.0	A
Max. Corrente Sopportabile Max. Carrying Current	2.0	A
Max. Tensione Commutabile Max. Switching Voltage	230	V _{DC} /V _{AC}

CARATTERISTICHE MECCANICHE MECHANICAL DATA

Materiale del Corpo Material of Body Colore/Color	PA66 30FG Nero/Black
Materiale Dadi M12x1 Material of Nut M12x1 Colore/Color	PA66 30FG Nero/Black
Cavo in guaina/Lead Wire Diam./Diam. Colore/Color	CEI 20-22 Ed.III CEI 20-37 Ø 6.0 mm Nero/Black
Conduttori/Conductors	2 x 0.50 mm ²
Temperatura di esercizio Operating temperature	-20 / +100 °C



Distanze massime di intervento Maximum operating distances	
	ON/OFF
A	30.0
B	35.0

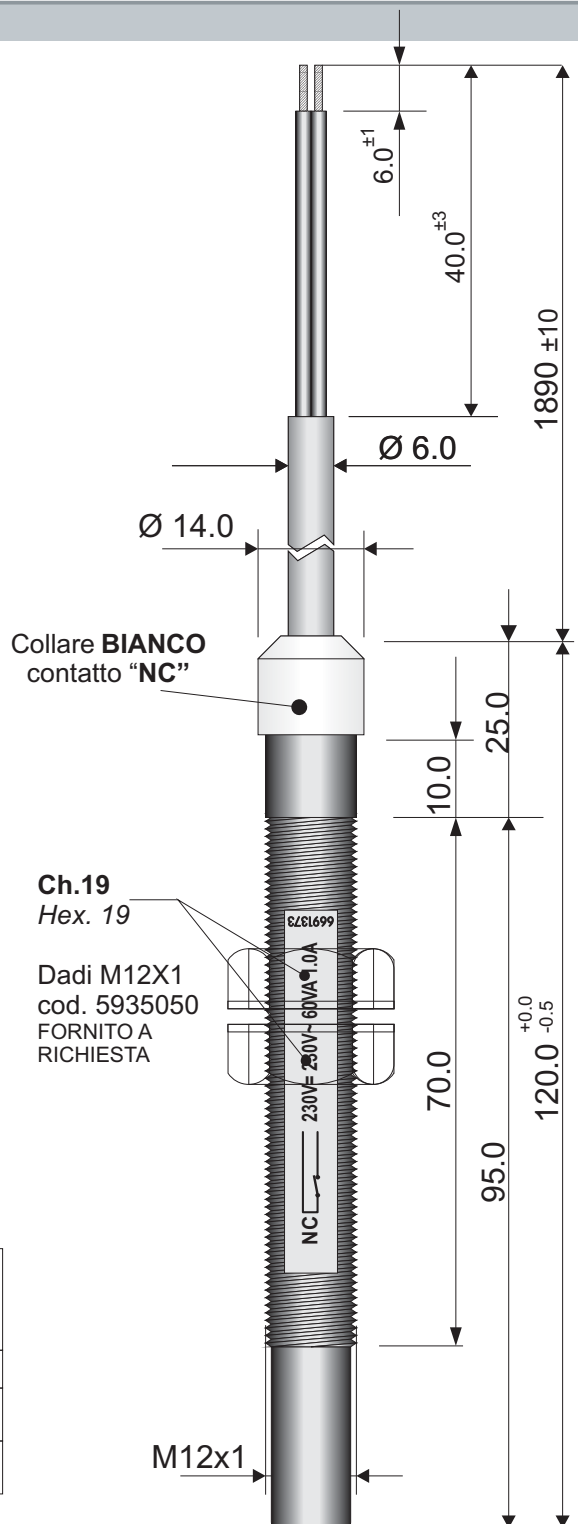

Prodotto protetto da brevetto di invenzione